


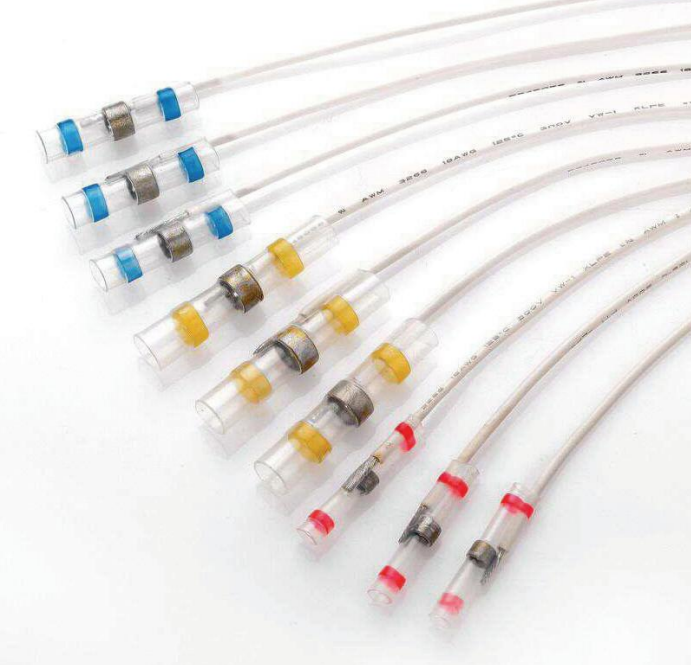

DS-RS CONNECTORS & TERMINALS

Heat shrink solder sleeve wire shield terminators

Applications

One piece design, used for shield to ground termination. High performance PE transparent sleeve provides insulation, inspection, strain relief and water proof. Preinstalled ground lead and pre-fluxed solder perform provides a perfectly soldered, strain-relieved and environmentally protected terminal.

Features

Shrink ratio 2:1
Abrasion and chemical corrosion resistance
Transparent sleeve provides precise inspection

Operating temperature:

Operating temperature:-55°C~125°C
Minimum shrink temperature:80°C

Technical data

Item	Typical Data
Operating temperature	-55°C~125°C
Shrink temperature	>160°C
Dielectric strength	1kv
Protection type	IP67

Dimensions

Part No.	Heat Shrink tube (mm)		Solder sleeve (mm)		Preinstalled wire lead(mm)		
	D	L	d	H	A.W.G	mm ²	L2
270	2.7	25	2.7	2.5	22	0.5	165
450	4.5	29	4.5	2.5	22	0.5	160
600	6.0	32	6.0	3.5	22	0.5	155
700	7.0	33	7.0	3.5	22	0.5	155
870	8.7	35	8.7	3.5	22	0.5	155
1070	10.7	35	10.7	3.5	22	0.5	155
1300	13	45	13	4.5	22	0.5	155
1780	18	56	18	6.0	22	0.5	155

*Other size available on request.

